
	PORTABLE GRINDERS	Date:
	TOOLBOX / TAILGATE TALK	Presenter:

- Keep work area clean and well lit.
- Stay alert. A moment of inattention while operating power tools may result in serious personal injury.
- Never operate without all safety guards in place.
- Accessories must be rated for at least the speed recommended on the tool-warning label.
- Using any wheel rated less than required and/or an incorrect sized wheel may result in wheel breakage, flying wheel fragments, and could resulting in death or serious injury.
- Handle tool correctly. Do not drop or throw the tool.
- Never use tools for applications other that those specified.
- Keep all screws, bolts and covers tightly in place.
- Blades and accessories must be securely mounted to the tool.
- Disconnect the plug from the power source before making any adjustments, changing accessories, or storing the tool.
- Avoid accidental starting. Be sure switch is off before plugging in.
- Check for misalignment or binding of moving parts, breakage of parts, and any other condition that may affect the tool's operation.
- Never leave tool running unattended. Turn power switch off and unplug.
- Always wear **proper eye/face protection** when operating.
- Always firmly grip the body handle and side handle while operating the grinder.
- Always have a trial run before grinding, test the grinder before using.
- Never place your hands, fingers or other body parts near tool's moving parts.
- Do not press the grinder forcibly against the surface to be ground. Heavy pressure can result in wheel breakage and serious injury. It can also damage the surface being ground or damage the grinder's motor.
- Use proper grinding angle. Grind only with the wheel's edge by lifting the grinder 15 to 30 degrees.
- Do not use the entire surface of the depressed center wheel. Use only the edge of the depressed center wheel.
- Move the grinder in the proper direction during operations.

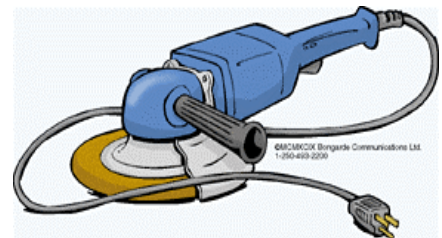

Always read and understand all of the safety precautions, warning and operating instructions before operating or maintaining any power tool.

PRINT NAME IN FULL	SIGNATURE
1.	
2.	
3.	
4.	
5.	
6.	
7.	
8.	
9.	
10.	
11.	
12.	
13.	
14.	
15.	
16.	
17.	
18.	
19.	
20.	
21.	